



# Split core current transformers

for busbar 80 x 120 mm




## SWU 80120

### Type SWU 80120

<b>Width</b>	155 mm
<b>Depth</b>	34 / 58 mm
<b>Busbar size</b>	80 x 120 mm
<b>Round cond.</b>	Ø 80 mm

**Accessories incl.** foot fastening brackets  
busbar fixing material  
secondary terminal cover

<b>Weight</b>	approx. 1320 g
---------------	----------------

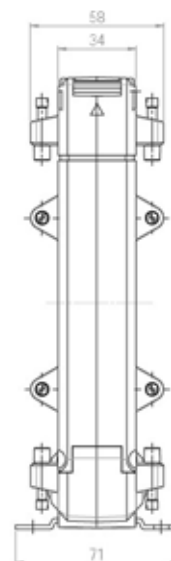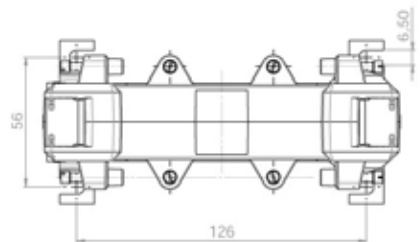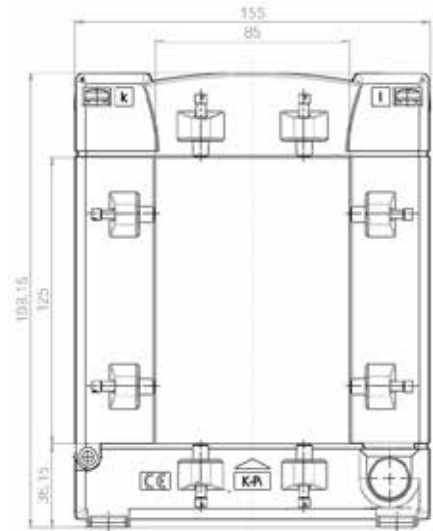

### Types and variants

Primary current in A	VA	class 1		class 0,5	
		sec. 5 A	sec. 1 A	sec. 5 A	sec. 1 A
250	1,5	X	X	-	-
300	2,5	X	X	-	-
400	2,5	X	X	-	-
500	2,5	-	-	X	X
	5	X	X	-	-
600	2,5	-	-	X	X
	5	X	X	-	-
750	2,5	-	-	X	X
	5	X	X	-	-
800	2,5	-	-	X	X
	7,5	X	X	-	-
1000	5	-	-	X	X
	10	X	X	-	-
	15	-	-	-	-
1200	5	-	-	X	X
	10	X	X	-	-
	15	-	-	-	-
1250	7,5	-	-	X	X
	15	X	X	-	-
1500	7,5	-	-	X	X
	10	-	-	-	-
	15	X	X	-	-
1600	10	-	-	-	-
	15	-	-	-	-
2000	10	-	-	-	-
	15	-	-	-	-
2500	10	-	-	-	-
	15	-	-	-	-
3000	15	-	-	-	-
	30	-	-	-	-
4000	15	-	-	-	-
	30	-	-	-	-
5000	15	-	-	-	-
	30	-	-	-	-