



Wound primary CT's

for direct connection

WSR 60

Primary current 1 - 40 A




Type WSR 60

Width	60 mm
Depth	30 mm
Busbar size	-- mm
Round cond.	-- mm
Accessories incl.	foot fastening brackets secondary terminal cover
Weight	approx. 250 g



Types and variants

Primary current in A	VA	class 1		class 0,5	
		sec. 5 A	sec. 1 A	sec. 5 A	sec. 1 A
1	2,5	X	X	X	X
	5	X	X	X	X
2	2,5	X	X	X	X
	5	X	X	X	X
2,5	2,5	X	X	X	X
	5	X	X	X	X
4	2,5	X	X	X	X
	5	X	X	X	X
5	2,5	X	X	X	X
	5	X	X	X	X
6	2,5	X	X	X	X
	5	X	X	X	X
7,5	2,5	X	X	X	X
	5	X	X	X	X
10	2,5	X	X	X	X
	5	X	X	X	X
12,5	2,5	X	X	X	X
	5	X	X	X	X
15	2,5	X	X	X	X
	5	X	X	X	X
20	2,5	X	X	X	X
	5	X	X	X	X
25	2,5	X	X	X	X
	5	X	X	X	X
30	2,5	X	X	X	X
	5	X	X	X	X
40	2,5	X	X	X	X
	5	X	X	X	X

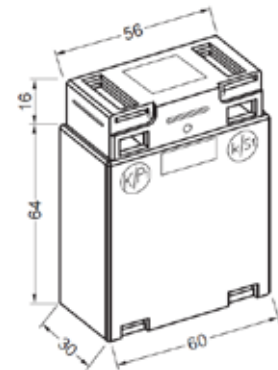

Accessories: see accessories