






Wound primary CT

for direct connection

WSWK-N

Type WSWK-N

Width	70 mm
Depth	50 / 55 mm
Busbar size	-- mm
Round cond.	-- mm
Accessories incl.	foot fastening brackets secondary terminal cover
Weight	approx. 500 g

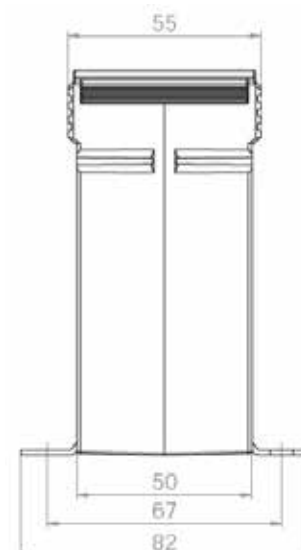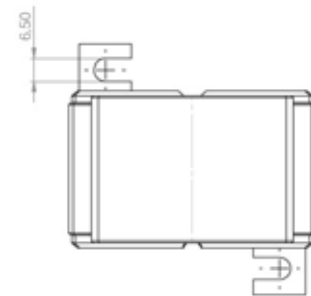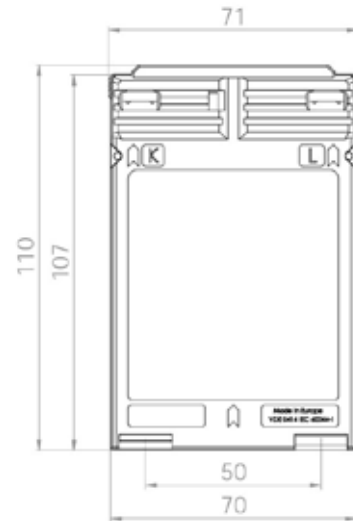

Types and variants

Primary current in A	VA	class 1		class 0,5	
		sec. 5 A	sec. 1 A	sec. 5 A	sec. 1 A
1	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
2,5	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
5	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
10	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
15	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
20	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
25	2,5	-	-	-	-
	5	-	-	-	-
	10	-	-	-	-
30	2,5	X	X	X	X
	5	X	X	X	X
	10	X	X	X	X
40	2,5	X	X	X	X
	5	X	X	X	X
	10	X	X	X	X
50	2,5	X	X	X	X
	5	X	X	X	X
	10	X	X	X	X

Accessories: see accessories