



Measuring transducers for potentiometers and resistors

Type:
W-MU




Application

The measuring transducer W-MU is used for the transformation and isolation of a change in resistance into an impressed direct current and direct voltage signal. The calibrated double outputs are switchable between 0-20 mA and 0-10 V or 4-20 mA and 2-10 V.




Function

A constant measuring voltage is applied to the potentiometer in case of 3-wire circuits. The measuring signal generated via the center tap is amplified and transformed into an impressed direct current or in an impressed direct voltage. In case of the 2-wire circuit, the measuring signal is generated using a constant current. The galvanic isolation is realized using an optocoupler. Both outputs are no-load proof and short-circuit proof. Connecting the two outputs is not permissible. An auxiliary voltage is required.

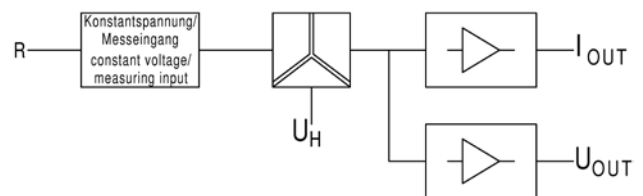

Connection

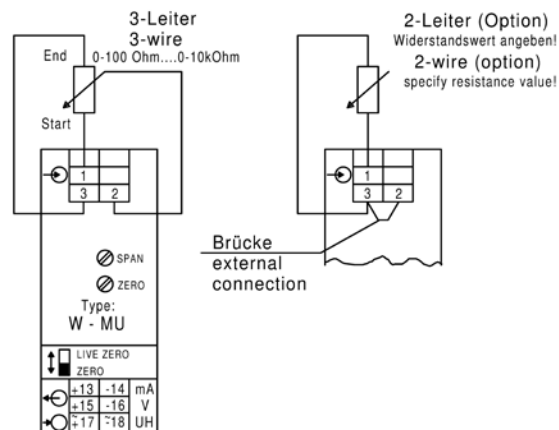

Types and variants

Input	3-wire conductor: 0-100 Ω to 0-10 k Ω
Output	0-20 mA and 0-10 V as well as 4-20 mA and 2-10 V switchable on front side
Surcharges	2-wire conductor: please specify resistance value Auxiliary voltage other than 230 V AC: 24 V DC 6-30 V AC + DC 36-265 V AC + DC 110 V AC
Frequency module	Type FM (frequency output 0-5 Hz up to 0-10 kHz) - (description page 10)
Relay module	for limit monitoring Type GWM - (description page 11)



Technical data

Input	Input variables	Resistance
	Rated values	3-wire: arbitrary value from 0-100 Ω to 0-10 k Ω 2-wire: 0-100 Ω, 0-500 Ω, 0-1000 Ω, other values on request
Output	Output variables	double output
	Rated values	0-20 mA / 500 Ω load and 0-10 V / max. load 10 mA as well as 4-20 mA / 500 Ω load and 2-10 V / max. load 10 mA switchable on front side
Transfer behavior	Accuracy	± 0,5 %
	Temperature range	-15 °C to +20 °C to +30 °C to +55 °C
	Temperature influence	< 0,2 % at 10 K
	Auxiliary voltage influence	no
	Load influence	no
	External magnetic field influence	no (400 A/m)
	Residual ripple	< 30 mVss
	Response time	< 300 ms
	Open circuit voltage	max. 24 V
	Current limiting	max. 2-fold in case of overload
Auxiliary voltage	Test voltage	4 kV between input, output, auxiliary voltage
	Options	230 V AC ± 20 %, 45-65 Hz, 2,5 VA ● 110 V AC ± 20 %, 45-65 Hz, 2,5 VA ● 24 V DC - 15 % to + 25 %, 2 W ● 6-30 V AC + DC, 2 VA ● 36-265 V AC + DC, 2 VA
Dimensions	Housing	Housing A, (22,5 mm wide) page A1
Weight		170 g
Installation	Fastening	Snap-on fastening on top hat rail 35 mm acc. to DIN EN 60 715
	Electrical connection	Screw terminal max. 4 mm ²